SPECSHEETS

WS713SS

www.Lumux.net	
Tel:	877-895-5552
REV B	Type:
	Project:

WALL SCONCE STAINLESS STEEL- wall / ceiling luminaire with open round trim for architectural lighting applications. UL & CUL listed. Suitable for wet locations. ADA compliant.

SPECIFICATION DATA

FIXTURE: STAINLESS STEEL TRIM WITH VANDAL RESISTANT STAINLESS STEEL SCREWS

SOCKET: Incandescent: MED BASE
Compact fluorescent: G23-2/ GX23-2/ G24Q-2 /G24Q-3/ GX24Q-3 / GX24Q-4
High Intensity Discharge: MED BASE

BALLAST: CLASS P, (ELECTRONIC AVAILABLE)

DIFFUSER: OPAL POLYCARBONATE

COATING: POWDER COAT PAINT.





OPTIONS - PLEASE SPECIFY

LAMP:

COMPACT FLUORESCENT:
INC60 - 60W; T10 MAX.
COMPACT FLUORESCENT:
PL9 - C.F. 9W; DOUBLE BIAX - 2PIN
PL13 - C.F. 13W; DOUBLE BIAX - 2PIN
PL18 - C.F. 18W; TRIPLE BIAX - 4PIN
PL26 - C.F. 26W; TRIPLE BIAX - 4PIN
PL32 - C.F. 32W; TRIPLE BIAX - 4PIN
PL42 - C.F. 42W; QUAD BIAX - 4PIN
HIGH INTENSITY DISCHARGE:
HPS35 - LU 35W ; ED17 / BD17
HPS50 - LU 35W ; ED17 / BD17
MH 50 - MH 50W; ED17 / BD17
MH 70 - MH70W; ED17 / BD17

VOLTAGE: **120** - 120 VOLT **277** - 277 VOLT

PHOTOMETRIC - PL 18W

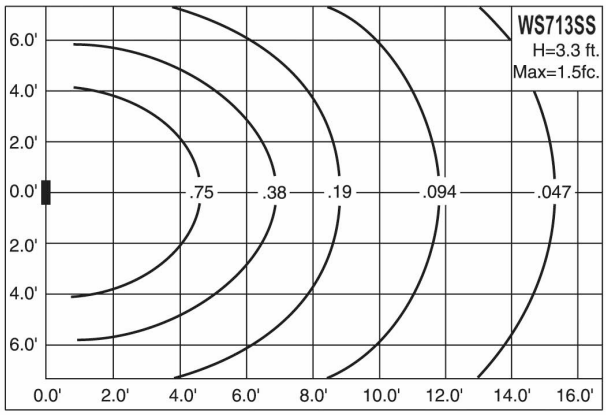

CATALOG # (Reccessed)	*A*	*C*	*D*	*LAMP (XXX)*			
WS713SS/XXX/120/*	10 5/8"	6 13/16"	2 1/2"	PL9	PL13	PL18	PL26
				PL32	PL42	MH70	HPS70