

# LUMUX

## STEP LIGHTS

### SL100

The Lumux SL100 series is a family of precision engineered, architectural LED step lights that are designed for durability and performance. Constructed from the highest quality materials and components, this step light is offered in a wide array of form factors and grill options to fit any specification. A diecast aluminum body is seamlessly integrated with its faceplate with captive, vandal resistant stainless-steel screws. This step light features a frosty glass diffuser, reducing glare, and is energy efficient for long-lasting indoor and outdoor applications. The SL100 has the capability to produce a “glow” affect around its perimeter, and different color LEDs could be specified simultaneously, one color for the front of the fixture and a different – or matching – color for the perimeter.

**Housing:** Heavy-duty construction of corrosion resistant, low-copper die cast aluminum. Faceplate secured with vandal resistant, stainless-steel screws.

**Lens:** 1/8" thick shatter-proof frosty glass diffuser

**Mounting:** Surface mounted

**Installation:** Installs into a standard j-box

**Finish:** Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

**Driver:** Constant current and universal input voltage 120/277V, starting temperature rated at -20°F.

**Gasket:** Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

**Protection Class:** IP65, ETL Listed for wet locations

**Wattage:** 4.5W

**Color Temperature:** 2700K / 3000K / 3500K / 4000K

Delivered Lumens:	2700K	3000K	3500K	4000K
	138Lm	144Lm	150Lm	160Lm

**CRI:** 90

**Warranty:** 5 year limited warranty


DATE:

PROJECT:


FIRM:

CATALOG NO.:

COMMENTS:

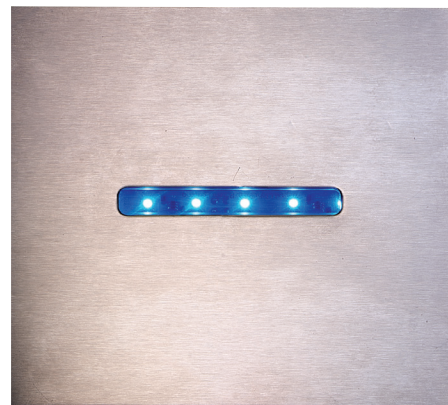

#### Dimensions:

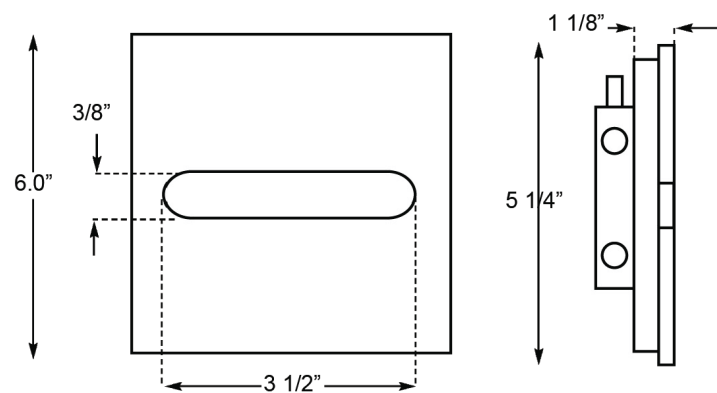

# LUMUX

## STEP LIGHTS

SL100

DATE:	
PROJECT:	
FIRM:	
CATALOG NO.:	
COMMENTS:	

Ordering Guide:

Catalog No.	LED Color	Color Temp <sup>1</sup>	Voltage	Finish	Options <sup>2</sup>
SL100	White	2700K	120/277	Black	Perimeter LED color (W)
	Blue	3000K		White	Perimeter LED color (B)
	Green	3500K		Silver	Perimeter LED color (G)
	Red	4000K		Bronze	Perimeter LED color (R)
	Amber			Custom RAL <sup>2</sup>	Perimeter LED color (A)

<sup>1</sup> Color Temperature applies only to White LED Color

<sup>1</sup> Consult factory for additional options

<sup>2</sup> Consult factory for additional options

Catalog No.: \_\_\_\_\_